


Specification/Open Sets-Cummins engine



3-Phase 50Hz@1500RPM

Model			Engine Spec				Alternator	Compact Version			
Genset	Prime KVA	Prime KW	Cons.Full	Engine	Cyl.	Gov.	Asp.	Brushless	Dimension(L*W*H)	Weight	Tank
Y-C22	22kVA	18kW	9.4L/h	4B3.9-G1	4	M	N/A	YDSF.I184E	1579*700*1914mm	765kG	150L
Y-C30	30kVA	24kW	9.4L/h	4B3.9-G1	4	M	N/A	YDSF.I184G	1579*700*1914mm	765kG	150L
Y-C42	42kVA	34kW	9.5L/h	4BT3.9-G1	4	M	TC	YDSF.I184J	1650*840*1436mm	800kG	160L
Y-C60	60kVA	48kW	14.0L/h	4BTA3.9-G2	4	E	TCA	YDSF.I224E	1750*850*1375mm	950kG	180L

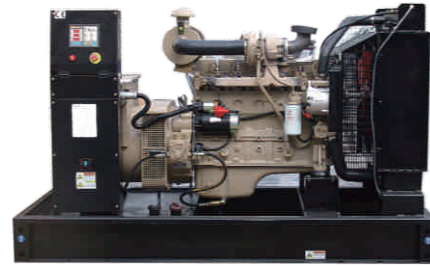

3-Phase 50Hz@1500RPM

Model			Engine Spec				Alternator	Compact Version			
Genset	Prime KVA	Prime KW	Cons.Full	Engine	Cyl.	Gov.	Asp.	Brushless	Dimension(L*W*H)	Weight	Tank
Y-C100	100kVA	80kW	20L/h	6BT5.9-G1	6	M	TC	YDSF.I274C	2100*895*1495mm	1110kG	280L
Y-C100	100kVA	80kW	20L/h	6BT5.9-G2	6	E	TC	YDSF.I274C	2050*924*1495mm	1130kG	280L
Y-C114	114kVA	91kW	23.8L/h	6BTA5.9-G2	6	E	TCA	YDSF.I274D	2350*1040*1485mm	1500kG	245L
Y-C130	130kVA	104kW	26L/h	6BTA5.9-G2	6	E	TCA	YDSF.I274E	2350*1040*1465mm	1590kG	245L



3-Phase 50Hz@1500RPM

Model			Engine Spec				Alternator	Compact Version			
Genset	Prime KVA	Prime KW	Cons.Full	Engine	Cyl.	Gov.	Asp.	Brushless	Dimension(L*W*H)	Weight	Tank
Y-C175	175kVA	140kW	37.5L/h	6CTA8.3-G2	6	E	TCA	YDSF.I274G	2350*1000*1440mm	1620kG	290L
Y-C200	200kVA	160kW	42.4L/h	6CTA8.3-G2	6	E	TCA	YDSF.I274H	2461*910*1620mm	1680kG	330L
Y-C250	250kVA	200kW	53.0L/h	6LTA8.9-G2	6	E	TCA	YDSF.I274K	2566*1182*1628mm	2030kG	355L



3-Phase 50Hz@1500RPM

Model			Engine Spec				Alternator	Compact Version			
Genset	Prime KVA	Prime KW	Cons.Full	Engine	Cyl.	Gov.	Asp.	Brushless	Dimension(L*W*H)	Weight	Tank
Y-C312	312kVA	250kW	61L/h	NTA855G1B	6	E	TCA	HC1444ES/LSA46.2VL12	3150*1000*1540mm	3150kG	490L
Y-C350	350kVA	280kW	74.6L/h	NTA855G2A	6	E	TCA	HC1444E/LSA47.2VS2	3150*1000*1540mm	3265kG	597L
Y-C350	350kVA	280kW	76L/h	NTA855G4	6	E	TCA	HC1444E/LSA47.2VS2	3150*1000*1540mm	3265kG	608L
Y-C375	375kVA	300kW	83.8L/h	NTA855G7A	6	E	TCA	HC1444FS/LSA47.2VS2	3150*1000*1540mm	4365kG	671L
Y-C450	450kVA	360kW	97L/h	KTA19G3	6	E	TCA	HC1544C/LSA47.2S5	3490*1150*1850mm	4368kG	856L
Y-C500	500kVA	400kW	107L/h	KTA19G4	6	E	TCA	HC1544C/LSA47.2S5	3490*1150*1850mm	4370kG	856L
Y-C625	625kVA	500kW	138L/h	KTA19G6A	6	E	TCA	HC1544FS/LSA47.2L9	4400*1760*2300mm	8560kG	948L
Y-C750	750kVA	600kW	167L/h	KTA38G2	12	E	TCA	HC11634H/LSA49.1M75	4400*1760*2300mm	8560kG	1336L
Y-C900	900kVA	720kW	200L/h	KTA38G2A	12	E	TCA	HC1634H/LSA49.1L10	4400*1760*2300mm	8580kG	1521L
Y-C1000	1000kVA	800kW	209L/h	KTA38G5	12	E	TCA	HC1634J/LSA50.2S4	4400*1760*2300mm	8580kG	1564L

Specification/Soundproof Sets-Cummins engine



3-Phase 50Hz@1500RPM

Model			Specification		Compact Version		
Genset	Prime KVA	Prime KW	Engine	Alternator	Dimension(L*W*H)	Weight	Tank
Y-C22S	22kVA	18kW	4B3.9-G1	YDSF.I184E	2180*1050*1400mm	1050kG	150L
Y-C30S	30kVA	24kW	4B3.9-G1	YDSF.I184G	2292*1105*1550mm	1050kG	150L
Y-C42S	42kVA	34kW	4BT3.9-G1	YDSF.I184J	2450*1105*1630mm	1380kG	160L
Y-C60S	60kVA	48kW	4BTA3.9-G2	YDSF.I224E	2450*1105*1630mm	1380kG	180L



3-Phase 50Hz@1500RPM

Model			Specification		Compact Version		
Genset	Prime KVA	Prime KW	Engine	Alternator	Dimension(L*W*H)	Weight	Tank
Y-C100S	100kVA	80kW	6BT5.9-G1	YDSF.I274C	2900*1205*1725mm	1680kG	280L
Y-C100S	100kVA	80kW	6BT5.9-G2	YDSF.I274C	2900*1205*1725mm	1680kG	280L
Y-C114S	114kVA	91kW	6BTA5.9-G2	YDSF.I274D	3250*1205*1875mm	2000kG	245L
Y-C130S	130kVA	104kW	6BTA5.9-G2	YDSF.I274E	3250*1205*1875mm	2020kG	245L



3-Phase 50Hz@1500RPM

Model			Specification		Compact Version		
Genset	Prime KVA	Prime KW	Engine	Alternator	Dimension(L*W*H)	Weight	Tank
Y-C175S	175kVA	140kW	6CTA8.3-G2	YDSF.I274G	3300*1335*1960mm	2600kG	290L
Y-C200S	200kVA	160kW	6CTA8.3-G2	YDSF.I274H	3300*1335*1960mm	2600kG	330L
Y-C250S	250kVA	200kW	6LTA8.9-G2	YDSF.I274K	3300*1335*1960mm	3030kG	355L